

# JABO SUPPLY

# TAPPING

# SLEEVES



*SINCE 1964 SINCE IS MORE THAN A PROMISE*



**5 LOCATIONS**

**PARKERSBURG, WV**  
10085 Emerson Avenue 26102  
(304) 464-4400

**NORTON, VA**  
205 Hawthorne Drive, 24273  
(276) 679-1224

**HUNTINGTON, WV**  
209 Braley Street, 25705  
(304) 736-8333

**MORGANFIELD, KY**  
118 Jim Veatch Road, 42437  
(270) 389-3430

**BEAVER, WV (BECKLEY)**  
227 C&O Shop Road 25813  
(304-252-0000

**SINCE 1964 SERVICE IS MORE THAN A PROMISE**

## PREFIX

## INDEX

DESCRIPTION	PAGE #
PICTURE INDEX	4
OD PIPE CHART	5
<b>BY: PRODUCT / MANUFACTURE</b>	
<b>SMITH BLAIR TAPPING SLEEVE</b>	<b>6-10</b>
662 Specification	6
662 Quick Reference Guide	7
662 Jabo # <b>MJ</b> Stainless Steel Body & Neck	8-9
662 Jabo # <b>Flanged</b> Stainless Steel Body & Neck	8-9
<b>DRESSER / TPS</b>	<b>11-17</b>
TRIPLE TAP Specifications	11-14
TRIPLE TAP Quick Reference Guide	15
TRIPLE TAP Jabo # <b>MJ</b> Extended Range Stainless Steel Tapping Sleeve	16-17
TRIPLE TAP Jabo # <b>Flanged</b> Extended Range Stainless Steel Tapping Sleeve	16-17






# TAPPING SLEEVES PICTURE INDEX

## PICTURE INDEX TAPPING SLEEVES

### SMITH BLAIR

### DRESSER TPS

662 TAPPING SLEEVE	662 TAPPING SLEEVE	TRIPLE TAP TAPPING SLEEVE	TRIPLE TAP TAPPING SLEEVE
FLANGE OUTLET	MJ OUTLET	FLANGE OUTLET	MJ OUTLET
			<p>PICTURE NOT AVAILABLE</p>
<p>PAGE 8-9</p>	<p>PAGE 8-9</p>	<p>PAGE 16-17</p>	<p>PAGE 16-17</p>

# OD CHART

## OD PIPE CHART

FOR RECOMMENDATION ONLY

### STEEL PIPE & STEEL SIZE PVC

SIZE	STD	IPS	SIZE	STD
INCHES	(SCH 40)		INCHES	(SCH 40)
1/2	0.84		4	4.50
3/4	1.05		4-1/2	5.00
1	1.32		5	5.56
1-1/4	1.66		6	6.63
1-1/2	1.90		8	8.63
2	2.38		9	9.63
2-1/2	2.88		10	10.75
3	3.50		12	12.75
3-1/2	4.00	14	14.00	

**STD (SCH 40) STEEL PIPE 14" ABOVE THE NOMINAL SIZE IS THE O.D.) (16=16.00 OD ,,ETC**

### COPPER TUBING

SIZE	PIPE O.D.
INCHES	(INCHES)
3/8	0.56
1/2	0.63
5/8	0.75
3/4	0.88
1	1.13
1-1/4	1.38
1-1/2	1.63
2	2.13
2-1/2	2.63
3	3.13
4	4.13
5	5.13
6	6.13

### DI, C900, CAST IRON

DI, C900, CAST IRON	
SIZE	PIPE O.D.
INCHES	INCHES
4	4.80
6	6.90
8	9.05
10	11.10
12	13.20
14	15.30

### ASBESTOS PIPE 4-16"

SIZE	CLASS	AC TRANITE		AC SIMPLEX	
		MACHINE	RB	MACHINE	RB
		END	MIN-MAX	END	MIN-MAX
4	100	4.64	4.79-5.14	4.70	4.95
	150	4.81	4.97-5.27	4.85	5.10
	200	4.81	5.22-5.77	5.20	5.45
6	100	6.91	7.05-7.40	6.76	7.01
	150	6.91	7.07-7.37	6.95	7.20
	200	6.91	7.26-7.56	7.50	7.75
8	100	9.11	9.22-9.57	8.80	9.13
	150	9.11	9.27-9.57	9.15	9.40
	200	9.11	9.39-9.74	9.76	10.01
10	100	11.24	11.42-11.77	11.18	11.43
	150	11.66	11.82-12.12	11.70	11.95
	200	11.66	11.77-12.12	12.20	12.45
12	100	13.44	13.69-14.04	13.36	13.61
	150	13.92	14.08-14.38	13.96	14.21
	200	13.92	14.03-14.38	14.46	14.72
14	100	15.07	15.40-15.80	15.56	15.94
	150	16.22	16.38-16.73	16.26	16.64
	200	16.22	16.48-16.88	16.88	17.26
16	100	17.15	17.54-17.94	17.76	18.14
	150	18.46	18.62-18.97	18.50	18.88
	200	18.46	18.79-19.19	19.30	19.68

### PIT CAST

PIT CAST PIPE ONLY			
SIZE	NOT CURRENT MANUFACTURE OR STD		
INCHES	CLASS A	CLASS B	CLASS C / D
3	3.8	3.96	3.96
4	4.8	5.00	5.00
6	6.9	7.10	7.10
8	9.05	9.05	9.30
10	11.1	11.10	11.40
12	13.2	13.20	13.50
14	15.3	15.30	15.65
16	17.4	17.40	17.80

### ASBESTOS PIPE 18"

CLASS	AC TRANITE		AC SIMPLEX	
	ME	RB MIN-MAX	ME	RB MIN-MAX
100	19.90	20.44	NA	NA
150	20.94	21.20	NA	NA
200	NA	NA	NA	NA

ASBESTOS PIPE 20"				
100	21.12	22.5	NA	NA
150	23.28	23.54	NA	NA
200	NA	NA	NA	NA

JABO SUPPLY DOES NOT WARRANTY OR GUARANTEE MANUFACTURED PIPE SIZES



## SMITH BLAIR STANDARD RANGE TAPPING SLEEVE



# Carbon Flange Tapping Sleeve

## Stainless Steel Body and Neck

# 662

### IMPORTANT LINKS

Click appropriate words to go to:

[Standard Limited Warranty](#)  
[Sales Terms & Conditions](#)  
[Freight Policy](#)  
[Returns Policy](#)  
[Corrosion & Product Selection Notice](#)



**Description:** Stainless Steel tapping sleeve, with Carbon Steel flange.

**Application:** For tapping pipe with reducing and size-on-size flanged outlets.

#### Key Features:

- Easy to install
- Range helps reduce inventory
- Meets applicable AWWA C223 Standards
- Molded-in ring in the gasket to ensure effective sealing
- Nylon washers are provided to improve bolt torque capability
- Heavy gauge, all-Stainless Steel body for rugged performance
- Fully chemically passivated for maximum corrosion protection
- 3/4" test outlet to allow hydrostatic pressure test before tapping the pipe
- 360° seal provides maximum support and reinforcement around the pipe in case of pipe break
- Body drawn out to accept the outlet neck adding to the overall strength of the area under the most stress

#### Materials Specifications (subject to change):

**BODY:** Full circumference band. 18-8 type 304 Stainless Steel

**FLANGES:** AWWA C207 Class D, ANSI 150# drilling. Recessed for Tapping Valve per MSS-SP 60

Fusion-Bonded, Flexi-Coat® epoxy coated Carbon Steel. *Optional: Other types of Flanges, threaded outlets, MJ Outlets*

**GASKET:** Nitrile (Buna-N) NSF® 61 compounded to resist water, oil, acids, alkalies, most (aliphatic) hydrocarbon fluids and many chemicals

Temperature Range: up to +180°F

**BOLTS, NUTS & WASHERS:** 18-8 Type 304 Stainless Steel heavy hex nuts, stud bolts & washers. Nuts and studs are coated to prevent galling

**Working Pressure:** Up to 240 PSI

**Pipe Applications:** Steel, Cast Iron, Asbestos Cement, PVC and other. For other pipe materials, please contact Smith-Blair Engineering.

**Sizes (in inches):** Please contact Smith-Blair for styles, sizes and pricing.

# SMITH BLAIR STANDARD RANGE TAPPING SLEEVE

## QUICK REFERENCE CHART

### SMITH BLAIR 662

SIZE (INCHES)	OD RANGE (INCHES)	IPS	DI	PIT CAST	MACHINE END						ROUGH BARREL					
			C900 CI		AC-T 100	AC-S 100	ACT-T 150	AC-S 150	AC-T 200	AC-S 200	AC-T 100	AC-S 100	ACT-T 150	AC-S 150	AC-T 200	AC-S 200
4	4.46-4.86	4.50			4.64	4.70	4.81	4.85	4.81			4.7				
	4.80-5.10		4.80	4.8-5.0				4.85	4.81							
	4.95-5.35									5.20	*4.79-5.14		*4.97-5.27	5.10	5.22-5.77	*5.45
6	6.59-6.99	6.63	6.90		6.91	6.76	6.91		6.91			6.76				
	6.84-7.30			6.9-7.1	6.91			6.95			7.05-7.40		7.07-7.37	7.20	7.26-7.56	
	7.40-7.80									7.50						7.75
8	7.90-8.30															
	8.62-9.06	8.63	9.05			8.8					8.8					
	8.99-9.45		9.05	9.05-9.30	9.11		9.11	9.15	9.11							
	9.20-9.60										9.22-9.57		9.27-9.57	9.40	9.39-9.74	
	9.60-10.00									9.76						10.01
10	10.73-11.13	10.75	11.10													
	11.05-11.45		11.10	11.10-11.40	11.24	11.18	*11.66	*11.70	*11.66		*11.42-11.77	11.18	*11.82-12.12	*11.95		
	12.00-12.40								12.20							12.45
12	12.50-12.90	12.75														
	13.16-13.56		13.20	13.20-13.50	13.44	13.36						13.36				
12-14	13.60-14.09	14.00					13.96	13.92			13.69-14.04			13.96		
12	14.10-14.58				*15.07	*15.07				14.46		14.46	14.08-14.38		14.03-14.48	*14.72
14	15.30-15.80		15.3	15.30-15.65							15.40-15.80					
	15.80-16.30	16.00					16.26	16.22						16.26		
	16.40-16.80									*16.88		16.38-16.73		16.48-16.88	*17.26	
16	17.40-17.80		17.4													
16-18	18.60-19.20															
18-20	19.50-20.10	20.00	19.5													
18-20	20.90-21.59															
20	21.60-22.40		21.6													

THIS IS ONLY A GUIDE, JABO SUPPLY DOES NOT GUARANTEE

CHECK ACTUAL PIPE SIZE- OD CHART DOES NOT MATCH ANY RANGE

NOT APPLICABLE

AC-T= Asbesto Transite  
 AC-S= Asbesto Simplex  
 100, 150, 200= Class of Pipe

# SMITH BLAIR STANDARD RANGE TAPPING SLEEVE

## TAPPING SLEEVES

SMITH BLAIR 662



SIZE (INCHES)	OD RANGE (INCHES)	OUTLET TYPE	
		MJ	FLANGE
4 X 4	4.46-4.86	073-25082	073-25078
	4.80-5.10	*	
	4.95-5.35	*	
6 X 4	6.59-6.99	073-25106	073-25102
6 X 6		*	073-25110
6 X 4	6.84-7.30	*	*
6 X 6		*	*
6 X 4		*	*
6 X 6	7.10-7.50	*	*
6 X 4		*	*
6 X 6	7.40-7.80	*	*
6 X 4		*	*
8 X 4	7.90-8.30	*	*
8 X 6		*	*
8 X 4	8.62-9.06	*	073-25170
8 X 6		073-25182	073-25178
8 X 8		073-25190	*
8 X 4	8.99-9.45	*	*
8 X 6		*	*
8 X 8		*	*
8 X 4	9.20-9.60	*	*
8 X 6		*	*
8 X 8		*	*
8 X 4	9.60-10.00	*	*
8 X 6		*	*
8 X 8		*	*
10X4	10.73-11.13	*	073-25278
10 X 6		073-25286	073-25282
10 X 8		073-25294	073-25290
10 X 10		*	073-25298
10X4	11.05-11.45	*	*
10 X 6		*	*
10 X 8		*	*
10 X 10		*	*

SIZE (INCHES)	OD RANGE (INCHES)	OUTLET TYPE	
		MJ	FLANGE
10X4	12.00-12.40	*	*
10 X 6		*	*
10 X 8		*	*
10 X 10		*	*
12 X 4	12.50-12.90	*	*
12 X 6		*	*
12 X 8		*	*
12 X 10		*	*
12 X 12	13.16-13.56	*	*
12 X 4		*	073-25430
12 X 6		*	073-25438
12 X 8		*	073-25446
12 X 10	13.60-14.09	*	073-25454
12 X 12		*	073-25454
12 X 4		*	*
12 X 6		*	*
12 X 8	14.10-14.58	*	*
12 X 10		*	*
12 X 12		*	*
12 X 4		*	*
12 X 6	15.30-15.80	*	*
12 X 8		*	*
12 X 10		*	*
12 X 12		*	*
14 X 4	15.30-15.80	*	*
14 X 6		*	*
14 X 8		*	*
14 X 10		*	*
14 X 12		*	*

**\* NON STOCK CALL JABO SUPPLY**


STOCK - FLEXI-COAT® EPOXY COATED CARBON STEEL FLANGE

# SMITH BLAIR STANDARD RANGE TAPPING SLEEVE

## TAPPING SLEEVES

SMITH BLAIR 662

SMITH BLAIR 662

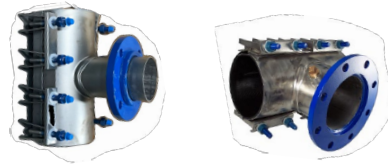

SMITH BLAIR 662



SIZE (INCHES)	OD RANGE (INCHES)	OUTLET TYPE	
		MJ	FLANGE
14 X 4	15.80-16.30	*	*
14 X 6		*	*
14 X 8		*	*
14 X 10		*	*
14 X 12		*	*
14 X 4	16.40-16.80	*	*
14 X 6		*	*
14 X 8		*	*
14 X 10		*	*
14 X 12		*	*
16 X 4	17.40-17.80	*	*
16 X 6		*	*
16 X 8		*	*
16 X 10		*	*
16 X 12		*	*
16-18 X 4	18.60-19.20	*	*
16-18 X 6		*	*
16-18 X 8		*	*
16-18 X 10		*	*
16-18 X 12		*	*
18-20 x 4	19.50-20.10	*	*
18-20 x 6		*	*
18-20 x 8		*	*
18-20 x 10		*	*
18-20 x 12		*	*
18-20 x 4	20.90-21.59	*	*
18-20 x 6		*	*
18-20 x 8		*	*
18-20 x 10		*	*
18-20 x 12		*	*
20 X 4	21.60-22.40	*	*
20 X 6		*	*
20 X 8		*	*
20 X 10		*	*
20 X 12		*	*

SIZE (INCHES)	OD RANGE (INCHES)	OUTLET TYPE	
		MJ	FLANGE
20 X 4	23.50-24.20	*	*
20 X 6		*	*
20 X 8		*	*
20 X 10		*	*
20 X 12		*	*
24 X 4	25.80-26.60	*	*
24 X 6		*	*
24 X 8		*	*
24 X 10		*	*
24 X 12		*	*
24 X 4	28.30-29.00	*	*
24 X 6		*	*
24 X 8		*	*
24 X 10		*	*
24 X 12		*	*

**\* NON STOCK CALL JABO SUPPLY**

STOCK -FLEXI-COAT® EPOXY COATED CARBON STEEL FLANGE


# SMITH BLAIR STANDARD RANGE TAPPING SLEEVE

## TAPPING SLEEVES

SMITH BLAIR 662

### Tapping Sleeve Specifications

OUTLET SIZE	NOMINAL BODY SIZE	A (IN.)	B (IN.)	C (IN.)	D (IN.)	E	F (IN.)
4	4	15	5	5 1/16	4 1/4	8	5/8
	6-18	15	5	5 1/16	4 1/4	8	5/8
	20-24	20	5	5 1/16	4 1/4	15	5/8
6	6	15	5	7 1/16	6 5/16	8	5/8
	8-18	15	5	7 1/16	6 5/16	8	5/8
	20-24	20	5	7 1/16	6 5/16	15	5/8
8	8	20	5	9 1/16	8 3/8	10	5/8
	10-18	20	5	9 1/16	8 3/4	10	5/8
	20-24	25	5	9 1/16	8 3/4	24	5/8
10	10	25	5	11 3/32	10 1/4	16	5/8
	12-18	25	5	11 3/32	10 3/4	16	5/8
	20-24	25	5	11 3/32	10 3/4	24	5/8
12	12	25	5	13 3/32	12 1/4	16	5/8
	14-18	25	5	13 3/32	12 3/4	16	5/8
	20-24	25	5	13 3/32	12 3/4	24	5/8

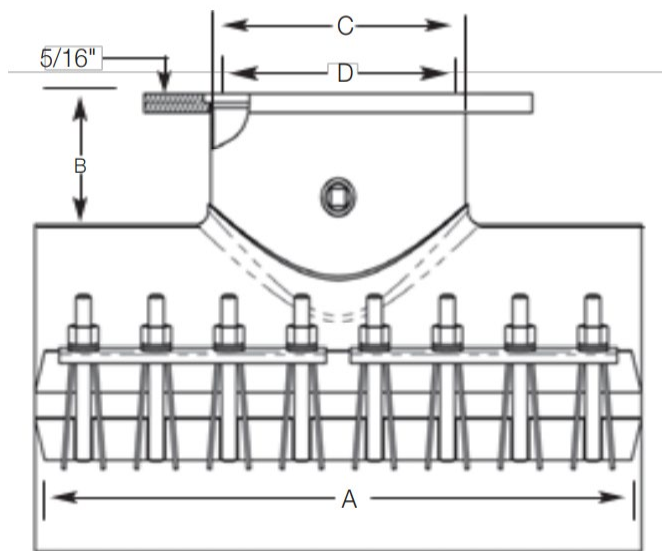

(E) Qty. of Bolts

(F) Bolt Size



# Triple Tap<sup>®</sup>

Extended Range  
Stainless Steel Tapping & Line Stop Sleeves

Sizes 4" – 30" Available in Flanged or MJ Outlet  
Patented Gasket System for 360° seal  
Universal Fit Including DIP, PVC & HDPE  
More range 0.9" = less inventory




## DRESSER (TPS) WIDE RANGE TAPPING SLEEVE

### Fewer Sizes, Less Inventory = More With Less

The TPS Triple Tap features a number of distinct advantages, including a double range body, allowing a substantial reduction in inventory. One sleeve is able to accommodate tapping steel, ductile, PVC, polyethylene and asbestos cement pipes in a given nominal diameter range. There is no need for extra on-hand sizes to accommodate the local market requirements for hot tapping water and sewer pipes.

The Triple Tap includes an easy to install hinged body geometry that offers extra spreading range without having to fully disassemble the product, allowing quick bolt up and installation. Our patented lug, shell and gasket design technologies provide enhanced performance, easier fit and less inventory.

The Triple Tap exceeds industry Standards, AWWA C223 and MSS SP-124-2012. An opposing seal bead system on the upper and lower gaskets combines to provide a secure 360° seal.

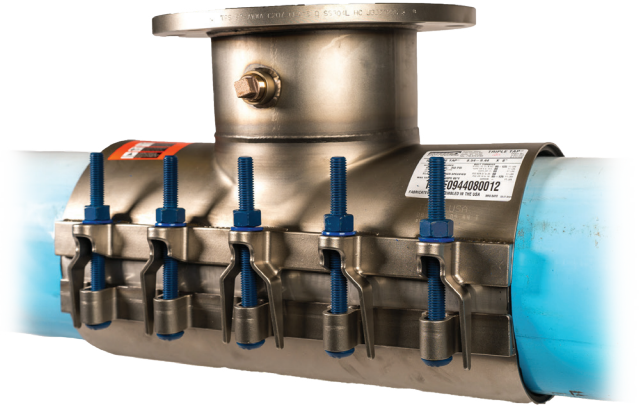

### Specifications

**Nominal Sizes:** 4" - 30"

**Range:** Up to 0.9" per sleeve

**Flange:** As standard, 18-8 Stainless Steel (Type 304SS) drilled to AWWA Class "D" per AWWA C228 and machined with a recess per MSS SP-60 to accept industry tapping valves

**Optional Flanges:** ANSI and AWWA C228 or C207 class flanges, or Mechanical Joint (MJ) outlet in Epoxy Coated Carbon or Stainless Steel are available upon request

**Pressure Rating\*:** AWWA C228 or C207 Class "D" Flange and is determined by the rating of the flange supplied on sleeve. When properly installed Triple Tap Tapping Sleeves is capable of working pressures up to 250\*psi, with hydrostatic testing up to 350\*psi

**Temperature Rating:** 180°F maximum continuous temperature

**Gasketing:** NBR Rubber certified to NSF-61/372 for drinking water

**Shell:** Heavy duty 18-8 Stainless Steel (type 304). 4" – 8" diameters uses 12 gauge. 10" – 16" diameters uses 11 gauge. 18" – 30" diameter uses 10 gauge

**Alignment Lugs:** Heavy Gauge 18-8 Stainless Steel (type 304)

**Branch Pipe:** 18-8 Stainless Steel (type 304)

**Spanner Plate:** Heavy gauge 18-8 Stainless Steel (type 304) integral with gasket

**Test Port:** 3/4" Stainless Steel port with 3/4" IPS Stainless Steel pipe plug

**Hardware:** 304 Stainless Steel nuts, bolts, and washers with fluoropolymer coating to prevent galling

**Testing:** Triple Tap is tested for beam breakage on a simulated 360-degree break test performed at 1.5 times rated pressure on a test pipe designed with a 1/8" wide by 3/16" deep hydrostatically pressurized groove

*NOTE\*:* The pressure rating, temperature rating, and bolt torque shown on the product label are the actual ratings of the individual product. Pressure Rating is limited by the flange used on sleeve and will not exceed the pressure rating of the pipe. The allowable working pressure of the tapping sleeve will be determined by the size of pipe, type of pipe, type of sleeve, application, condition of the pipe, environmental and service conditions, and installation workmanship.

*NOTE\*\*:* For use on (HDPE) polyethylene pipe\*, Triple Tap is only recommended for underground service. Contact customer service for complete information regarding performance and use on polyethylene pipe.



## DRESSER (TPS) WIDE RANGE TAPPING SLEEVE

### Mechanical End Joint (Optional)

- » MJ End Meets ANSI/AWWA C-111
- » Direct Valve Face to MJ Flange Face mounting ensures perfect alignment of the valve and eliminates gaps between the Valve and flange interface
- » Pre-Installed Mechanical Joint NBR NSF 61/372 approved gasket provides seal eliminating cold flow or rolling into line
- » Non-Flexible Joining Interface for Proper Cutter Alignment
- » Slotted Bolt Holes Included for Ease of Installation
- » Available on All Triple Tap Sizes

*NOTE: Tapping Sleeve Reuse: Due to spanner forming (creasing) and other permanent set deformations incurred in installation, tapping sleeves must not be reused until refurbished with new bolts and new gaskets at DPS. Always insure the main pipe has the structural integrity to resist the mechanical load of the tapping sleeve or the product may not seal properly.*



### Triple Tap Tapping Sleeve Sizes

Nominal Dia.	Extended Range (in.)	Outlet/ Branch Sizes	Range Pipe Diameter (in.)
4	4.45-5.13	2-4"	CTS, IPS, DIP, PVC Pit Cast
4 o.s.	4.74-5.36	2-4"	DI, PVC, Pit Cast, AC 100/150
5	5.50-6.20	4"	CTS, IPS
6	6.55-7.42	4-6"	IPS, DIP, PVC Pit Cast, AC 100/150
6 o.s.	6.84-7.65	4-6"	DIP, PVC DIP, Pit Cast, AC 100/150/200
8	8.54-9.44	4-8"	IPS, DIP, PVC, Pit Cast
8 o.s.	8.98-9.84	4-8"	DIP, PVC, Pit Cast, AC 100/150/200
10	10.64-11.46	4-10"	IPS, DIP, PVC Pit Cast
10 o.s.	11.34-12.16	4-10"	Pit Cast, AC 100/150/200
12	12.62-13.56	4-12"	IPS, DIP, PVC, Pit Cast
12 o.s.	13.65-14.42	4-12"	IPS, AC 100/150/200
14	15.22-16.16	4-12, 14"	IPS, DIP, PVC, Pit Cast, AC 100
14 o.s.	16.18-16.92	4-12, 14"	AC 150/200
16	17.25-18.18	4-12, 14, 16"	IPS, DIP, PVC, Pit Cast, AC 100
16 o.s.	18.42-19.23	4-12, 14, 16"	AC 150/200
18	19.37-20.25	4-12, 14, 16"	DIP, PVC, Pit Cast
20	21.40-22.22	4-12, 14, 16"	DIP, PVC, Pit Cast
24	25.60-26.40	4-12, 14, 16"	DIP, PVC, Pit Cast
30	29.50 -30.35	4-12, 14, 16"	IPS

Contact customer service for additional sizes and configurations.

Size-on-size outlets require 1/2" undersized shell cutter.

# DRESSER (TPS) WIDE RANGE TAPPING SLEEVE

## Triple Tap Line Stop Sleeve

Available in 4" - 24" Diameters with Branches and with treaded or push completion plugs up to 12".

Compatible with common Line stop equipment, and similar to the Triple Tap Tapping Sleeve, it is designed to withstand the stresses and mechanical forces incurred during the line stopping process even during beam break conditions.

Designed for use on Steel, Cast & Ductile Iron, PVC, HDPE , Abestos Cement, and copper.

**Line Stop Compatible Outlet:** ANSI/ASME B16.5 Class 150# slip-on flange in 304 stainless or carbon steel.

Compatible with commonly used line stopping equipment with an MSS SP60 recess for all industry standard tapping valves.

Optional Type "H" End Equipment interface available.



**Line Stopping Completion Plug:** Completion Plugs may be threaded or push style. Plug construction is of Ductile Iron per ASTM A536. Completion Plug interfaces are designed to fit all common line stopping equipment. For completion plug interface dimensions contact customer service.

**3/4" Test Outlet:** Allows for hydrostatic pressure test before tapping the pipe and for pressure equalization


**Blind Flange/Debris Cover:** Standard AWWA Class B 150# Available upon request

**Blind Flange Bolts:** 304 Stainless steel with anti-gall coating on nuts

Contact customer service for additional details, sizes and configurations.

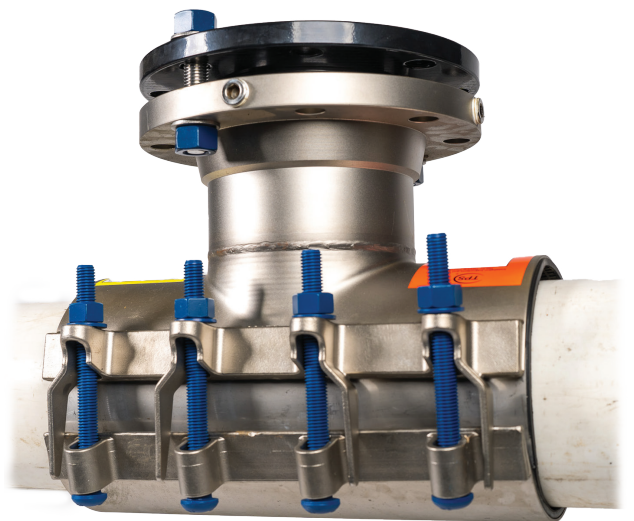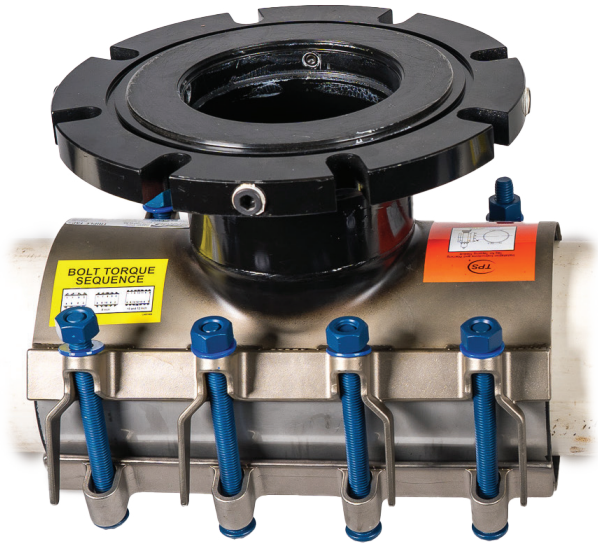


**WARNING** This product is not intended for use on natural gas piping or any other type of gas piping. To do so could result in escaping gas that could ignite and cause property damage, serious injury or death.



**WARNING** This is a non-restraining product. If pipe pullout can occur, proper anchoring of the pipe joint is required. Failure to anchor the pipe could result in the escape of line content, and may cause property damage, serious injury or death.

SEWER PIPE RANGES		
4"	4.10	4.90
6"	6.20	7.00
8"	8.35	9.15

**WARNING** This product is intended for use on HDPE SDR-17 or greater wall thicknesses, and shall be used for buried service only. The DPS Triple Tap product line is not approved for above ground applications on HDPE or other plastic pipe




**Dresser Coupling & Repair**  
 1760 Haskell Road  
 Olean, NY 14760  
 P: 716-372-0160  
 F: 716-372-1767  
[www.dresserutility.com/water](http://www.dresserutility.com/water)

© 2024 Dresser Water, LLC – All rights reserved. Dresser Utility Solutions reserves the right to make changes in specifications and features shown herein, or discontinue the product described at any time without notice or obligation. Contact your Dresser Utility Solutions representative for the most current information. The Dresser Logo and all Trademarks containing the term "Dresser" are the property of Dresser, LLC, a subsidiary of Baker Hughes and are used under license. Actaris™ is a trademark owned by Itron, Inc. and is used under license.



[www.dresserutility.com/water](http://www.dresserutility.com/water)

Triple Tap 4-Page DUS.DPSW.002  
05.24

# DRESSER (TPS) WIDE RANGE TAPPING SLEEVE

## QUICK REFERENCE CHART

### DRESSER /TPS TRIPLE TAP



SIZE (INCHES)	OD RANGE (INCHES)	IPS	DI	PIT CAST	MACHINE END						ROUGH BARREL					
			C900		AC-T	AC-S	ACT-T	AC-S	AC-T	AC-S	AC-T	AC-S	ACT-T	AC-S	AC-T	AC-S
			CI		100	100	150	150	200	200	100	100	150	150	200	200
4	4.45-5.13	4.50	4.80	4.8-5.0	4.64	4.70	4.81	4.85	4.81			4.70		4.85	4.81	4.95
4 os	4.74-5.36									5.20	4.79-5.14		4.97-5.27	4.85	4.81	4.95
5	5.50-6.20															
6	6.55-7.42	6.63	6.90	6.9-7.1	6.91	6.76	6.91	6.95	6.91			6.76		6.95	6.91	
6 os	6.84-7.65									7.50	7.05-7.40		7.07-7.37	6.95	6.91	7.75
8	8.54-9.44	8.63	9.05	9.05-9.30	9.11	8.80	9.11	9.15	9.11			8.80	N	9.15	9.11	
8 os	8.98-9.84		9.05	9.05-9.30	9.11		9.11	9.15	9.11	9.76	9.22-9.57		9.27-9.57	9.15	9.11	10.01
10	10.64-11.46	10.75	11.10	11.10-11.40	11.24	11.18						11.18				
10 os	11.34-12.16						11.66	11.70	11.66	12.20	11.42-11.77		11.82-12.12	11.70	11.66	
12	12.62-13.56	12.75	13.20	13.20-13.50	13.22	13.36						13.36				12.75
12 os	13.65-14.42	14.00					13.96	13.96	13.92	14.46	13.69-14.04		14.08-14.38	13.96	13.92	14.72
14	15.22-16.16	16	15.2	15.30-15.65	15.07	15.56					15.40-15.80	15.56				
14 os	16.18-16.92						16.22	16.26	16.22	16.88			16.38-16.73	16.26	16.22	
16	17.25-18.18	18	17.4	17.40-17.80												17.26
18	18.42-19.23															
18-20	19.37-20.25	20	19.5													
20	21.40-22.22		21.6													
24	25.60-26.40		25.8													
30	29.50-30.35	30														

THIS IS ONLY A GUIDE, JABO SUPPLY DOES NOT GUARANTEE

CHECK ACTUAL PIPE SIZE- OD CHART DOES NOT MATCH ANY RANGE

NOT APPLICABLE

AC-T= Asbesto Transite

AC-S= Asbesto Simplex

100, 150, 200= Class of Pipe

# DRESSER (TPS) WIDE RANGE TAPPING SLEEVE

## TAPPING SLEEVES

DRESSER (TPS) TRIPLE TAP



PHOTO SS FLANGE OUTLET



SIZE (INCHES)	OD RANGE (INCHES)	OUTLET TYPE	
		MJ	FLANGE
4 X 2	4.45-5.13	*	*
4 X 4		*	*
4 X 2	4.74-5.36	*	*
4 X 4		*	*
5	5.50-6.20	*	*
6 X 4	6.55-7.42	*	*
6 X 6		*	*
6 X 4	6.84-7.65	*	*
6 X 6		*	*
8 X 4	8.54-9.44	*	*
8 X 6		*	*
8 X 8		*	*
8 X 4	8.98-9.84	*	*
8 X 6		*	*
8 X 8		*	*
10 X 4	10.64-11.46	*	*
10 X 6		*	*
10 X 8		*	*
10 X 10		*	*
10 X 4	11.34-12.16	*	*
10 X 6		074-50708	*
10 X 8		*	*
10 X 10		*	*
12 X 4	12.62-13.56	*	*
12 X 6		074-50740	*
12 X 8		*	*
12 X 10		*	*
12 X 12	13.65-14.42	*	*
12 X 4		*	*
12 X 6		*	*
12 X 8		*	*
12 X 10		*	*
12 X 12	*	*	

SIZE (INCHES)	OD RANGE (INCHES)	OUTLET TYPE	
		MJ	FLANGE
14 X 4	15.22-16.16	*	*
14 X 6		*	*
14 X 8		*	*
14 X 10		*	*
14 X 12		*	*
14 X 14		*	*
14 X 4	16.18-16.92	*	*
14 X 6		*	*
14 X 8		*	*
14 X 10		*	*
14 X 12		*	*
14 X 14	17.25-18.18	*	*
16 X 4		*	*
16 X 6		*	*
16 X 8		*	*
16 X 10		*	*
16 X 12		*	*
16 X 14	18.42-19.23	*	*
16 X 16		*	*
16 X 4		*	*
16 X 6		*	*
16 X 8		*	*
16 X 10	19.37-20.25	*	*
16 X 12		*	*
16 X 14		*	*
16 X 16		*	*
18 X 4		*	*
18 X 6	19.37-20.25	*	*
18 X 8		*	*
18 X 10		*	*
18 X 12		*	*
18 X 14		*	*
18 X 14	*	*	

STOCK= EPOXY COATED FLANGE

SS FLANGE AVAILABLE

\*NON STOCK CALL JABO SUPPLY

## DRESSER (TPS) WIDE RANGE TAPPING SLEEVE

## TAPPING SLEEVES

DRESSER TRIPLE TAP

PHOTO SS FLANGE OUTLET




SIZE (INCHES)	OD RANGE (INCHES)	OUTLET TYPE	
		MJ	FLANGE
24 X 4	25.60-26.40	*	*
24 X 6		*	*
24 X 8		*	*
24 X 10		*	*
24 X 12		*	*
24 X 14		*	*
24 X 16		*	*
30 X 4	29-50 -30.35	*	*
30 X 6		*	*
30 X 8		*	*
30 X 10		*	*
30 X 12		*	*
30 X 14		*	*
30 X 16		*	*

**STOCK= EPOXY COATED FLANGE****SS FLANGE AVAILABLE****\*NON STOCK CALL JABO SUPPLY**



# JABO SUPPLY

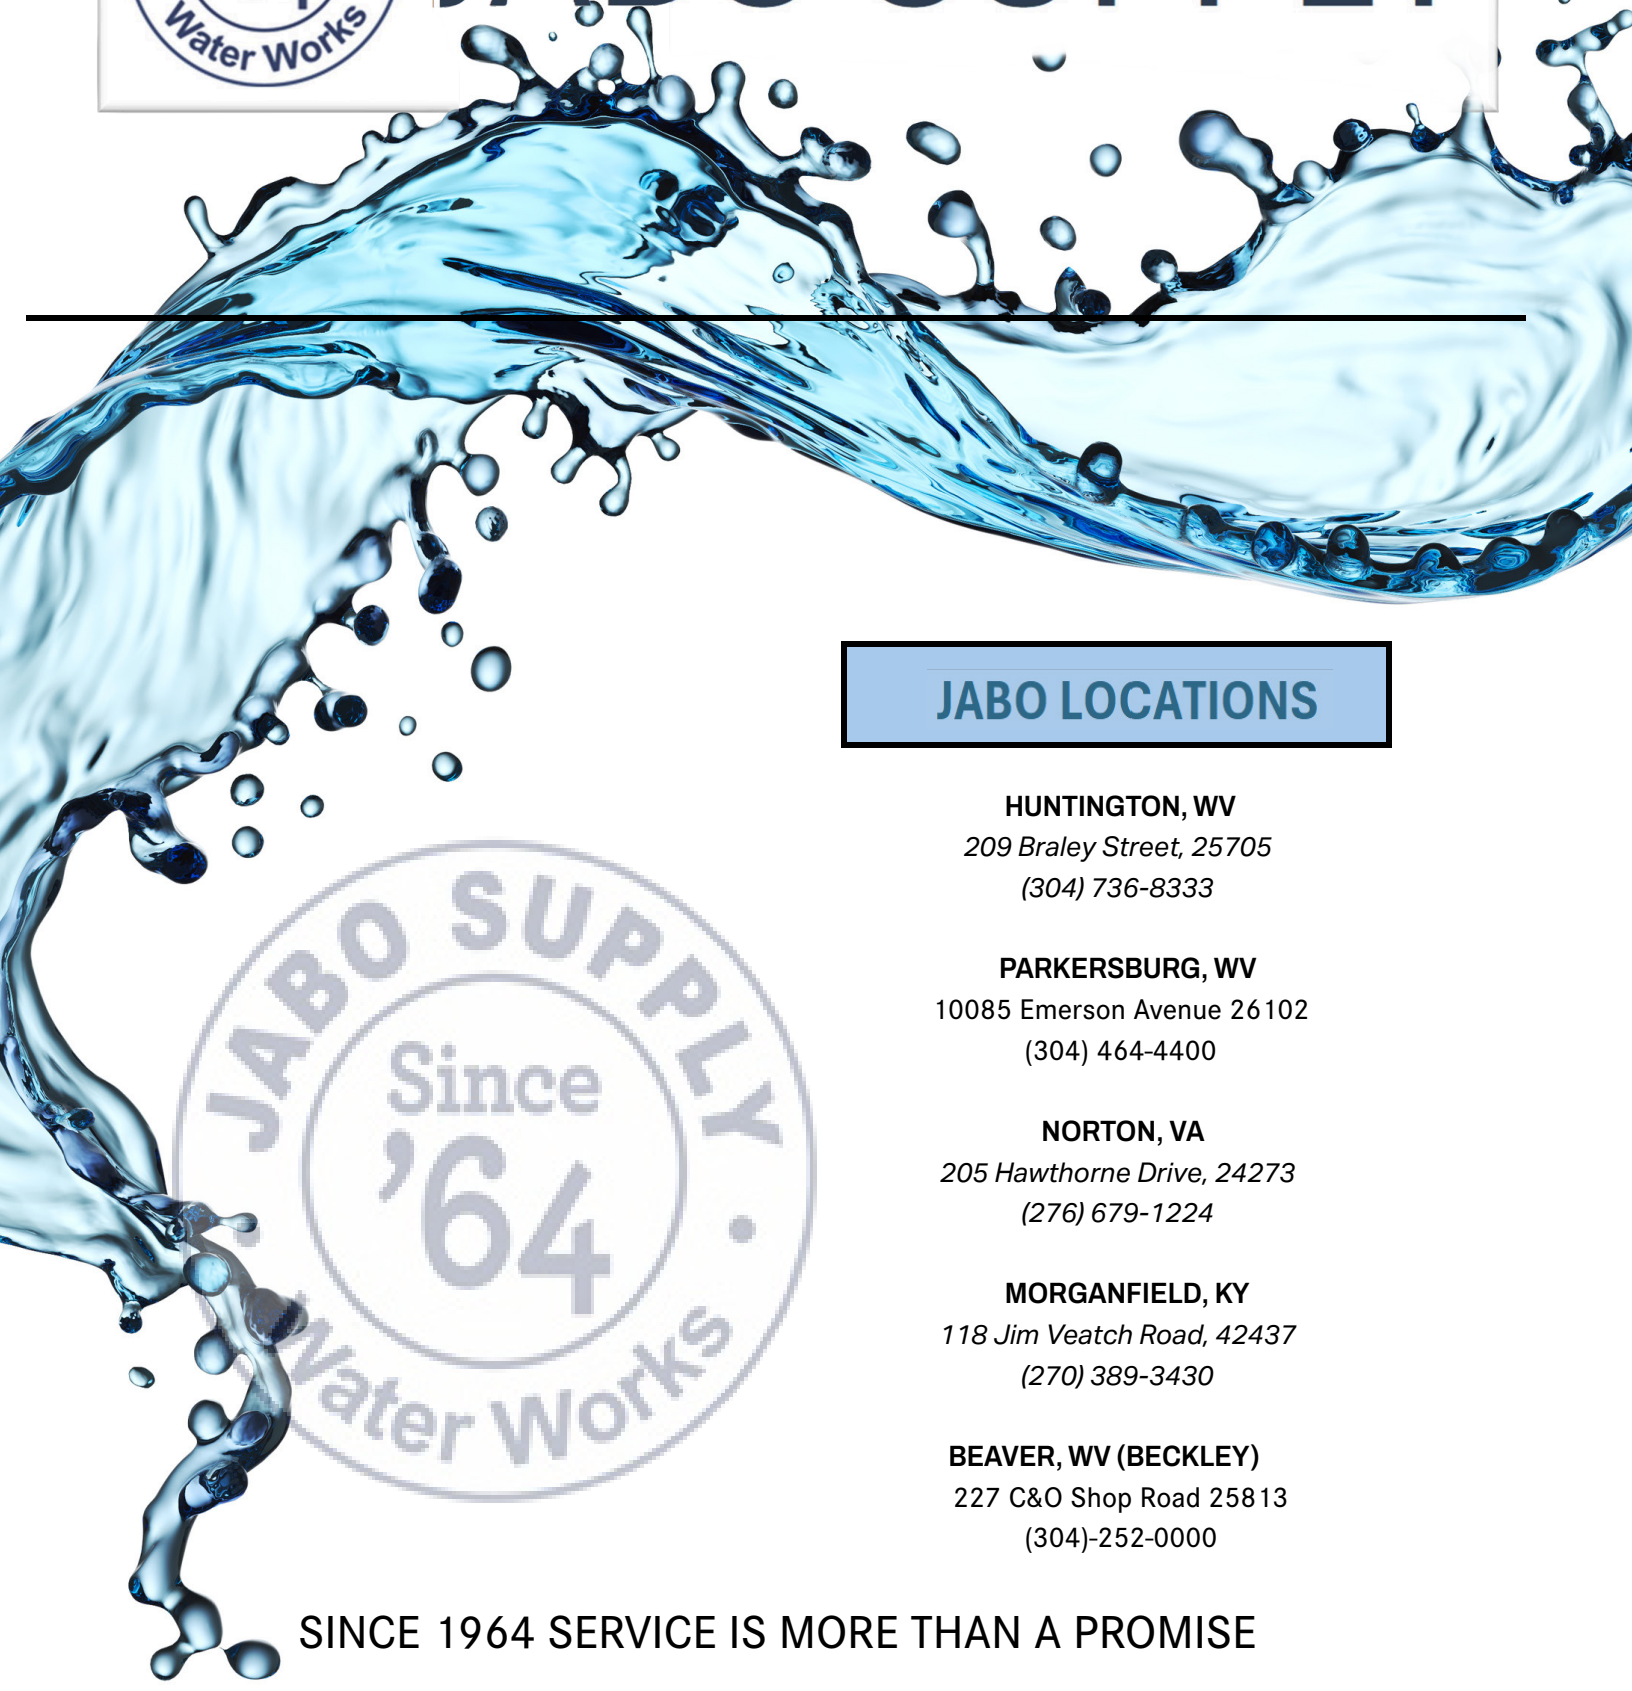

## JABO LOCATIONS

**HUNTINGTON, WV**

209 Braley Street, 25705  
(304) 736-8333

**PARKERSBURG, WV**

10085 Emerson Avenue 26102  
(304) 464-4400

**NORTON, VA**

205 Hawthorne Drive, 24273  
(276) 679-1224

**MORGANFIELD, KY**

118 Jim Veatch Road, 42437  
(270) 389-3430

**BEAVER, WV (BECKLEY)**

227 C&O Shop Road 25813  
(304)-252-0000

**SINCE 1964 SERVICE IS MORE THAN A PROMISE**